







CoeLux HT25 Mini



TECHNICAL INFORMATION:

SKYLIGHT SIZE Dimensione dello skylight	492 x 233 mm 19.3 x 9.1"
WEIGHT Peso	17.5 kg 38.5 lb
NECESSARY SPACE FOR INSTALLATION* Dimensioni minime necessarie	630 x 371 x h250mm 24.8 x 14.6 x h9.8"

*dimensions may differ slightly depending on the versions

*le dimensioni possono differire leggermente a seconda delle varianti

VERSIONS AVAILABLE Varianti disponibili	 zenith  0.4-100%  Classic		 zenith  40-100%  Smart Sky	
	Classic		Smart Sky	
POWER INPUT Power input	1 channel at 24 V DC		1 channels at 24 V DC	
POWER CONSUMPTION Consumo energetico	42.5 W (Max) - 42.5 W (Typical)		50 W (Max) - 46 W (Typical)	
TOTAL LIGHT OUTPUT Emissione luminosa	1600 lm		1400 lm (noon) - 1200 lm (sunset)	
FRAME AND MOUNTING OPTIONS: Cornice e montaggio:	The system can be surface mounted, semi-recessed, recessed (trim or trimless) Il sistema può essere montato a soffitto/parete, sporgente dal contro-soffitto, o ad incasso(trim o trimless)			
MOUNTING OPTIONS Opzioni di montaggio	Recessed Trimless / Remote PSU - on request		Recessed Trimless / Remote PSU - on request	
ORDER CODE CERTIFICATION Codice di ordinazione Certificazione	HT25MINI-3L-DAL-A-01 CE, CB, UL ongoing HT25MINI-3L-010-A-01 CE, CB, UL ongoing		HT25MINI-SS-DAL-A-01 CE, CB, UL ongoing HT25MINI-SS-010-A-01 CE, CB, UL ongoing	
	Recessed trim / Remote PSU - on request		Recessed trim / Remote PSU - on request	
	HT25MINI-3L-DAL-B-01 CE, CB, UL ongoing HT25MINI-3L-010-B-01 CE, CB, UL ongoing		HT25MINI-SS-DAL-B-01 CE, CB, UL ongoing HT25MINI-SS-010-B-01 CE, CB, UL ongoing	
	Semi recessed / Remote PSU - on request		Semi recessed / Remote PSU - on request	
	HT25MINI-3L-DAL-C-01 CE, CB, UL ongoing HT25MINI-3L-010-C-01 CE, CB, UL ongoing		HT25MINI-SS-DAL-C-01 CE, CB, UL ongoing HT25MINI-SS-010-C-01 CE, CB, UL ongoing	
	Surface mounted / On board PSU - included		Surface mounted / On board PSU - included	
	HT25MINI-3L-DAL-D-01 CE, CB, UL ongoing HT25MINI-3L-010-D-01 CE, CB, UL ongoing		HT25MINI-SS-DAL-D-01 CE, CB, UL ongoing HT25MINI-SS-010-D-01 CE, CB, UL ongoing	

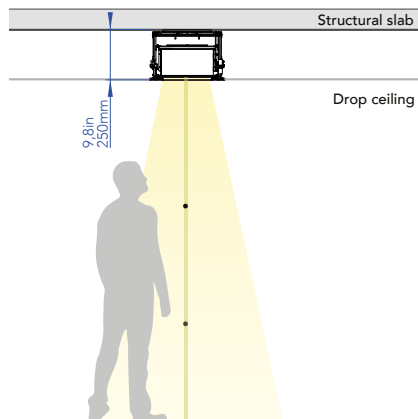

Typical horizontal illuminance
* Distance from CoeLux system (Sky)

CLASSIC	SMART SKY NOON	SMART SKY SUNSET
<ul style="list-style-type: none"> At 1 m (3.28")* 3600 Lux At 2 m (6.56")* 2000 Lux At 3 m (9.84")* 800 Lux 	<ul style="list-style-type: none"> At 1 m (3.28")* 3200 Lux At 2 m (6.56")* 1800 Lux At 3 m (9.84")* 700 Lux 	<ul style="list-style-type: none"> At 1 m (3.28")* 2700 Lux At 2 m (6.56")* 1500 Lux At 3 m (9.84")* 600 Lux

MOUNTING OPTIONS:

