








CoeLux HT25

TECHNICAL INFORMATION:

SKYLIGHT SIZE <small>Dimensione dello skylight</small>	520 x 1070 mm 22.4 x 42.1"
WEIGHT <small>Peso</small>	50 kg 110 lb
NECESSARY SPACE FOR INSTALLATION <small>Dimensioni minime necessarie</small>	1200 x 600 x 250 mm 47.2 x 23.6 x 9.8"

	 zenith  0.4-100%  Classic	 zenith  0.4-100%  Smart Sky
VERSIONS AVAILABLE <small>Varianti disponibili</small>	Classic	Smart Sky
POWER INPUT <small>Power input</small>	2 channels at 24 V DC	2 channels at 24 V DC
POWER CONSUMPTION <small>Consumo energetico</small>	170 W (Max) - 170 W (Typical)	210 W (Max) - 210 W (Typical)
TOTAL LIGHT OUTPUT <small>Emissione luminosa</small>	5900 lm	5300 lm (noon) - 4500 lm (sunset)
FRAME <small>Cornice</small>	The frame can be ceiling mounted or recessed flushed mounted <i>La cornice può essere montata a filo del contro-soffitto o leggermente sporgente</i>	
ORDER CODE CERTIFICATION <small>Codice di ordinazione Certificazione</small>	Remote PSUs - on request HT25-3L-DAL-01 CE, CB, UL, PSE HT25-3L-010-01 CE, CB, UL ongoing	Remote PSUs - on request HT25-SS-DAL-01 CE, CB, UL ongoing HT25-SS-010-01 CE, CB, UL ongoing

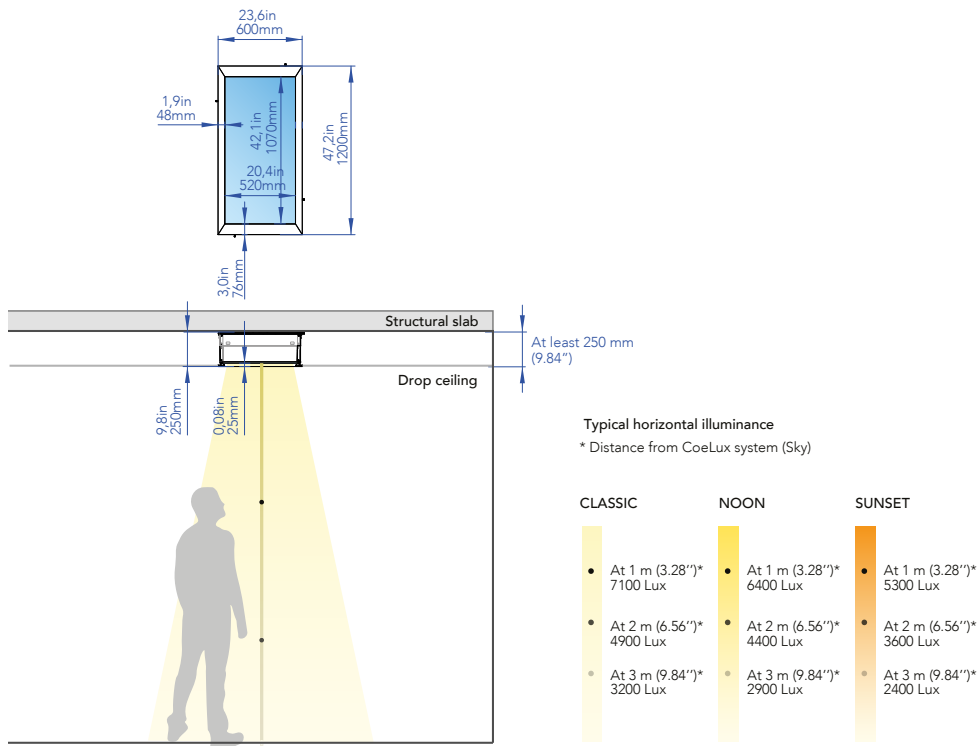

MOUNTING OPTIONS:

Ceiling mounted
Cornice in rilievo

Recessed flushed
Cornice a filo

