


CoeLux Sky Line

TECHNICAL INFORMATION:

SKYLIGHT SIZE <i>Dimensione dello skylight</i>	1178x30 mm 46.4 x 1.2"
WEIGHT <i>Peso</i>	6 kg 13.2 lb
NECESSARY SPACE FOR INSTALLATION* <i>Dimensioni minime necessarie</i>	1256 x 186 x h120 mm 49.4 x 7.3 x h4.7"

VERSIONS AVAILABLE <i>Varianti disponibili</i>	Classic	Smart Sky
	POWER INPUT <i>Power input</i>	1 channel at 57 V 1050 mA cc
POWER CONSUMPTION <i>Consumo energetico</i>	60 W (Max) - 60 W (Typical)	60 W (Max) - 60 W (Typical)
TOTAL LIGHT OUTPUT <i>Emissione luminosa</i>	2010 lm	1810 lm (noon) - 1430 lm (sunset)
FRAME <i>Cornice</i>	The system can be surface recessed (trim or trimless) Il sistema può essere incassato a soffitto (trim o trimless)	
FRAME <i>Cornice</i>	Recessed trimless / Remote driver - on request	Recessed trimless / Remote PSU - on request
ORDER CODE CERTIFICATION <i>Codice di ordinazione Certificazione</i>	SKYLINE-3L-A-01-CE CE, CB SKYLINE-3L-A-01-UL UL	SKYLINE-SS-M-A-01-CE CE, CB ongoing SKYLINE-SS-S-A-01-UL UL ongoing SKYLINE-SS-M-A-01-CE CE, CB ongoing SKYLINE-SS-S-A-01-UL UL ongoing
	Recessed trim / Remote driver - on request	Recessed trim / Remote PSU - on request
	SKYLINE-3L-B-01-CE CE, CB SKYLINE-3L-B-01-UL UL	SKYLINE-SS-M-B-01-CE CE, CB ongoing SKYLINE-SS-S-B-01-UL UL ongoing SKYLINE-SS-M-B-01-CE CE, CB ongoing SKYLINE-SS-S-B-01-UL UL ongoing

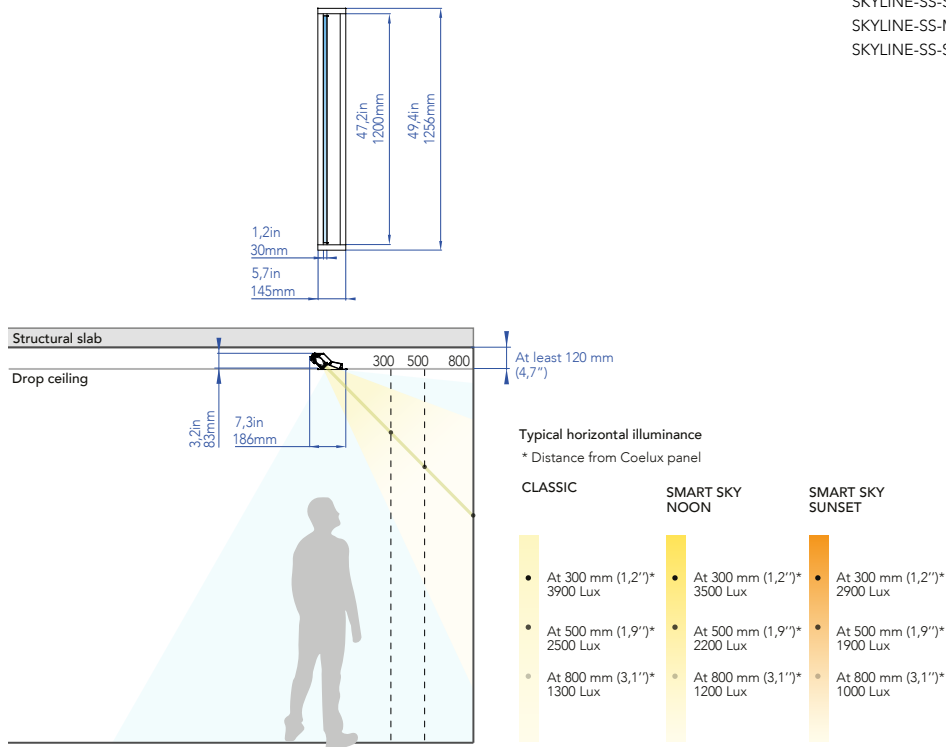

MOUNTING OPTIONS:

Recessed trim
Cornice incasso trim

Recessed trimless
Cornice incasso trimless

